

DESKTOP COLOR LABEL PRINTERS VP610 / VP660



SCALE

Dynamically,
Profitably,
Confidently.



High Print
Speed



Expressive
Color



High-Capacity
250ml
Ink Tanks


ONE OF THE BEST PRICE PERFORMANCE PRINTER IN ITS CLASS

The VP610/VP660 helps streamline your labeling workflow, reduces inventory and waste. These printers are simple to use and deliver up to 2,400 labels (4x6") in 10 min. Whether you need a hundred or ten thousand labels/day, you can depend on the VP610/VP660 to deliver every time.

Key benefits:

- ✓ High Speed - Print 2,400 (4 x 6") labels in less than 10 min.
- ✓ Brilliant color quality Image
- ✓ Large individual ink tanks
- ✓ Enhanced water-resistant inks (with VP660)
- ✓ Food safe & Environmentally friendly dye ink formula

STREAMLINE YOUR LABELING WORKFLOW FROM START TO END

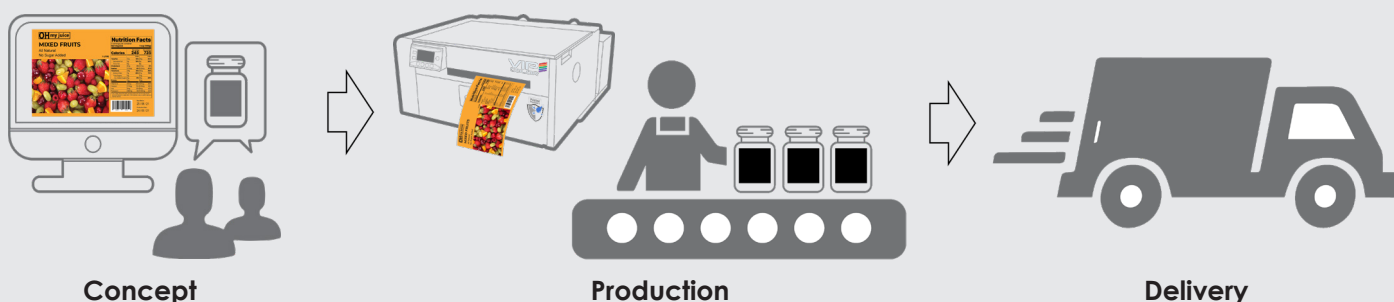

Asia Office
Email: asia@vipcolor.com
Phone: +65 6482 1755
Web: vipcolor.com

China Office
Email: asia@vipcolor.com
Phone: +86 21 3898 4898 x 8210
Web: vipcolor.com/zh

Europe Office
Email: info@vipcoloreurope.com
Phone: +34 93 588 3018
Web: vipcoloreurope.com

US Office
Email: sales@vipcolor.com
Phone: 1 800 404 3185
Web: vipcolor.com

DESKTOP COLOR LABEL PRINTERS VP610 / VP660



TECHNICAL SPECIFICATIONS

	VP610	VP660
Print speed	6 and 12 ips (154 and 305 mm/second)	
Print resolution	1,600 x 1,600 dpi and 1,600 x 800 dpi	
Print width/Length	2" - 8.5" (51 - 216 mm) / Up to 40" (1.016 m)	
Comm ports	USB 2.0, 10/100Base-T, GPIO	
Inks	Five individual 250ml dye	Five Individual 250ml (Enhanced water resistant) dye
Time to first label	Less than 10 seconds	
Print modes	Roll-to-Cut, Roll-to-Roll, Print & Hold	
Barcode PQ	Grade B or better for • 1D barcode (Code 39) with 10 mils bar width • 2D barcode (PDF417) with 10 miles cell size	
Electrical	Universal power supply - 100-240 Vac, Peak current < 4A	
Temperature	Operation: 15 to 35°C at RH 20 -80%; Storage: -5 to 50°C	
Safety/ Compliant	FCC Part 15, Subpart B, Class A (US), cULus, IEC-62368-1, RCM, CCC, UKCA mark, Singapore Safety Mark	
User Interface	Embedded web server, Backlit LCD control panel in 9 languages, LED for warning and readiness indication	
Acoustics	Sound pressure level < 60 dBA	
Printer Driver	Windows™ 10 and above	
Supported Software	All major Windows based label and graphic design applications like Adobe Illustrator, Nicelabel, Bartender.	
Sensor type	Gap, Reflective sensor for black mark	
Media type	Roll (continuous, die-cut), fan-fold	
Media thickness	0.1 - 0.3 mm	
Roll diameter	8" (203 mm) OD with 3" (76 mm) core	
Supported media	Glossy, matte, synthetics	
Others	Rugged metal casing, automatic cutter, patented print & hold mechanism	
Warranty	1 year warranty or 5M inches, whichever earlier	

Label Printer comes with unwinder

Weight: 66 lbs (30kg)



- High Speed Print
- Brilliant color quality Image
- Fine text, barcode and variable data



Print all you need in one-step!

Brilliant color images


We recommend the VP660 (with Enhanced water-resistant inks) for product labels that are exposed to moisture. (e.g. chilled/refrigerated food)




Fine text, barcode

Variable data


ACCESSORIES



Re-winder



Label Slitter



Matrix Remover & Slitter